



Hatch installation possibilities in various wall thicknesses


Hatch installation in wall <60mm

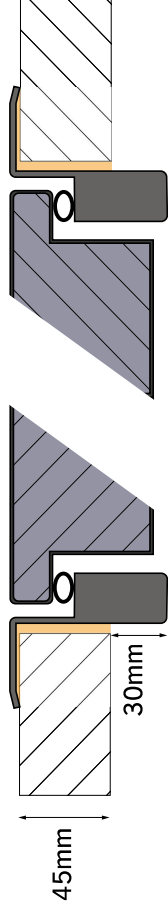

Hatch installation in wall =60mm

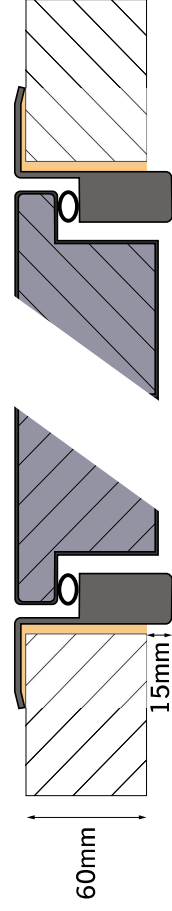

Hatch installation in wall > 60mm

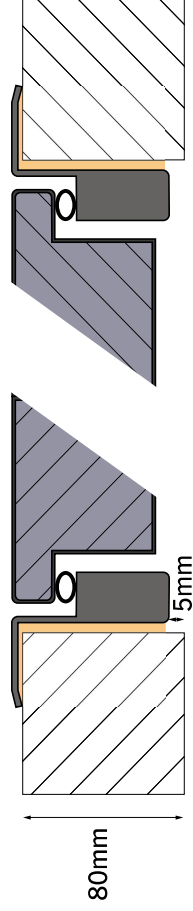

Access doors




Access doors

Standard


- ✓ Access door with a robust construction with aluminium frame and welded corners
- ✓ Flat rotating part made of aluminium with minimal structure of the frame and handle on the inside. The lower installation depth saves space so there is space for other inside parts e.g. cabinets
- ✓ Powder-coated in RAL 9016 white (the coating can also be repainted)
- ✓ Insulation with PU and PET rigid foam
- ✓ Standard access door opens to the inside of the cab with a maximum angle of ca. 180°
- ✓ A flat twist lock and knob cylinder is located on the inside; a locking cylinder and stainless steel handle are fitted on the outside. The locking cylinders can be delivered with simultaneous locking
- ✓ Design with thermal separate and robust sealing




Access doors model overview

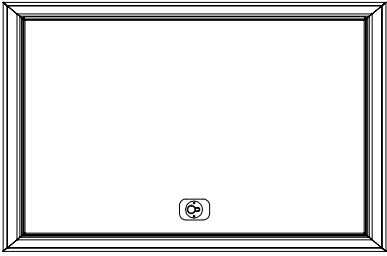


DT67107R




DT6787R




DT5767R

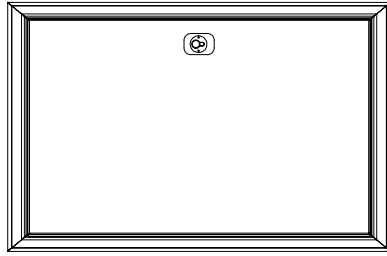


DT67107L



DT6787L



DT5767L

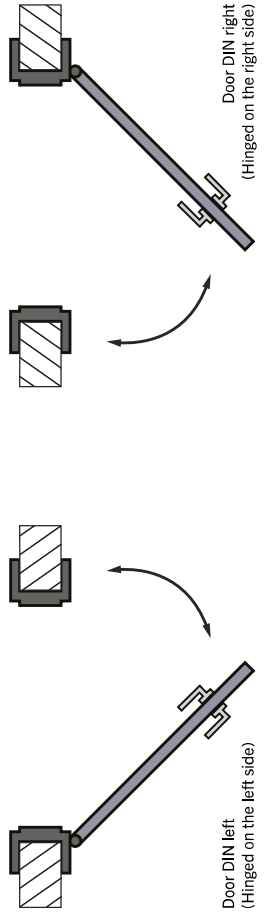

Dimensions access doors

DESIGNATION	DIMENSION OUTSIDE		DIMENSION INSIDE		CLEAR WALL		CUTOUT WALL		THICKNESS	WEIGHT
	A	B	C	D	E	F	G	H		
DT5767L-60	642	742	566	666	500	600	575	675	60	7,40
DT5767R-60	642	742	566	666	500	600	575	675	60	7,40
DT6772L	742	792	666	716	600	650	675	725	75	12,50
DT6772R	742	792	666	716	600	650	675	725	75	12,50
DT6787L	742	942	666	866	600	800	675	875	75	14,30
DT6787R	742	942	666	866	600	800	675	875	75	14,30
DT6797R	742	1042	666	966	600	900	675	975	75	16,50
DT67107L	742	1142	666	1066	600	1000	675	1075	75	17,50
DT67107R	742	1142	666	1066	600	1000	675	1075	75	17,50
DT67127L	742	1342	666	1266	600	1200	675	1275	75	20,80

